



SSP

Safety System Products

SAFIX Set I3-A-5M

RFID Safety Sensor, high coded, EDM, autom. reset, 5m

Your advantages

- PLe according to EN ISO 13849-1
- IP69K and ECOLAB
- Series connection of up to 30 sensors without reduction in safety
- No special analysis system required
- LED diagnosis
- Single information signal for diagnosis
- Highly coded according to EN ISO 14119 (version I3 and W3)
- Small compact design
- Different cable lengths
- Fastest sensor available (risk time)



To the downloads ►

we simplify safety

SAFIX Set I3-A-5M

The new SAFIX 3 RFID safety sensor impresses due to its compact design and a hole distance of 22 mm. It can be actuated from the front and both sides and is available in 3 different versions with a choice of low level or high level coding according to EN ISO 14119. The sensor has protection class IP69K, holds an ECOLAB approval and can either be purchased with an M12, 8-pin pigtail cable or a fixed cable length of 5 or 10 metres.

Thanks to its OSSD output signals, the sensor can be connected to all standard control and safety relays. A total of up to 30 sensors can be switched in series. An information signal and a three colour LED display on the sensor are provided for diagnosis purposes.

General data

Type designation	SAFIX Set I3-A-5M
Functional type	RFID safety sensor
Item number	SP-E-76-000-48
Service life TM (EN ISO 13849-1)	20 Years
Coding levels	Individually coded

Safety data

Performance Level (EN ISO 13849)	PL _e
Category (EN ISO 13849-1:2015)	cat. 4
SIL (acc. IEC 62061)	SIL3, SILCL3
PFHd (EN ISO 13849)	2,24 x 10 ⁻⁹
Approvals	TÜV_SÜD, CE

Environmental conditions

Max. storage temperature	-25 ... +70 °C
Max. operating temperature	-25 ... +70 °C
Contamination level	2

Electrical data

Overvoltage category	II
Rated impulse withstand voltage U _{imp}	1 kV

SAFIX Set I3-A-5M

Electrical service life (nominal load)	20 Years
Design / Connections	5m fixed cable with open end
Contact type	OSSD
Supply voltage	DC +/- 10% 24 V
Rated insulation voltage Ui	50 V
Power consumption in ambient conditions	23,75 W
No-load current I0	(not activated) 10 mA / (activated) 30 mA
Max. voltage (VDC)	1 A
Switching frequency	3
LED lighting	3 colors
Utilisation category	D-12/DC-13
Risk time	75 ms
Series connection	30

Pin assignment according DIN 47100

BN	UB
WH	safety input 1
BU	GND
BK	safety output 1
GY	diagnostic output
PK	safety input 2
VT	safety output 2
OG	EDM/Start-input

Mechanical data

Dimensions

Width	36 mm
Length	13 mm
Height	26 mm
Torque (mounting nut)	0,7 Nm
Mounting	Screw connection with M4 screws (sunk)
Housing material	PBT
Shock resistance	30 g/11 ms
Vibration resistance	Amplitude 1 mm, 10 ... 55 Hz

SAFIX Set I3-A-5M

Switching distance S _n	12 mm
Assured switching distance ON S _(ao)	8 mm
Assured switching distance OFF S _(ar)	18 mm
Hysteresis	2 mm
Repeat accuracy R	< 0,5 mm

LED diagnostics

Advanced LED diagnosis

Extended LED-Diagnosis


Green	Red	Yellow	Remark
off 	off 	on 	Sensor not actuated, voltage applied
on 	off 	off 	Sensor actuated, all inputs set correctly
flashes 	off 	off 	Sensor actuated, safety inputs not set (low level)
flashes 	off 	off 	Safety inputs set (high level), waiting for start pulse
off 	off 	flashes 	Actuator at the reception limit
off 	off 	flashes 	Teach in process

Green	Red	Yellow	Remark
off 	flashes 	off 	Error safety outputs
off 	flashes 	off 	Error safety inputs
off 	flashes 	off 	Error safety inputs. EDM automatic: Safety relay fault. EDM manual: Faulty start impulse
off 	flashes 	off 	Overvoltage and undervoltage fault
off 	flashes 	off 	Temperature outside the permitted range
off 	flashes 	off 	Wrong actuator
off 	on 	off 	Permanent light Internal device error

SAFIX Set I3-A-5M


Electrical drawings

Connection drawing

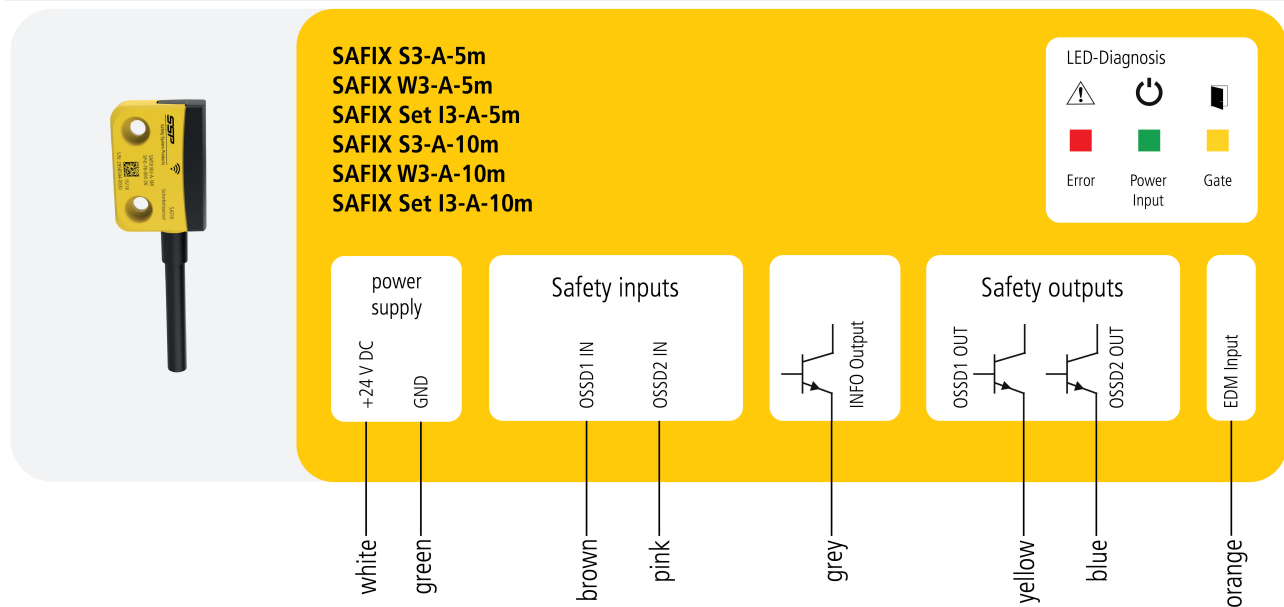

SAFIX Set I3-A-5M


Connection example 2

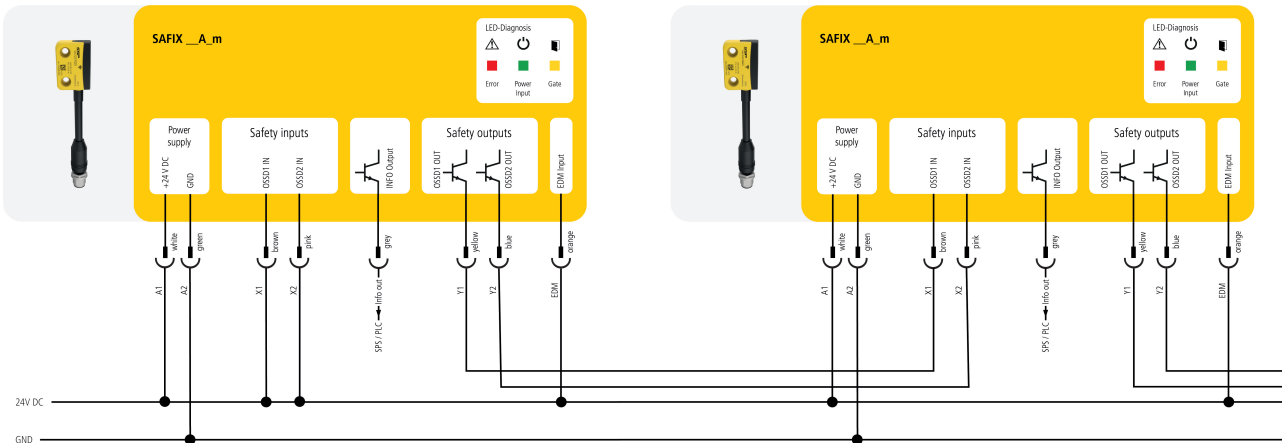

Series connection with diagnostic output, automatic reset For the variant EDM input automatic (SAFIX __A__) The inputs X1 and X2 are connected with 24 V DC. The outputs Y1 and Y2 are connected to the evaluation. The diagnostic output can be connected to a PLC, for example.

SAFIX Set I3-A-5M

Connection example 1

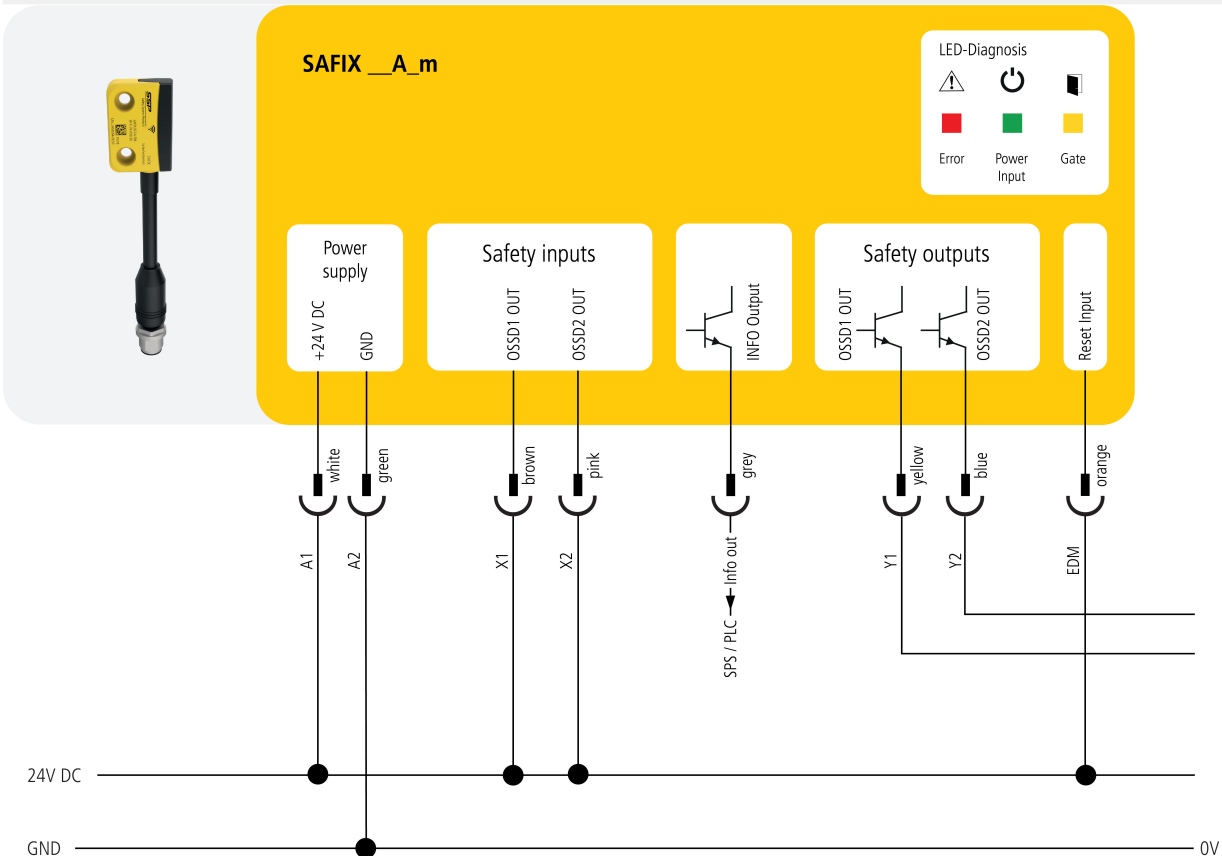


Connection with diagnostic output, automatic reset

For the variant EDM input automatic (SAFIX __A__)

The inputs X1 and X2 are wired with 24V DC. The outputs Y1 and Y2 are connected to the evaluation. The diagnostic output can be connected to a PLC, for example.

SAFIX Set I3-A-5M

Connection example 3

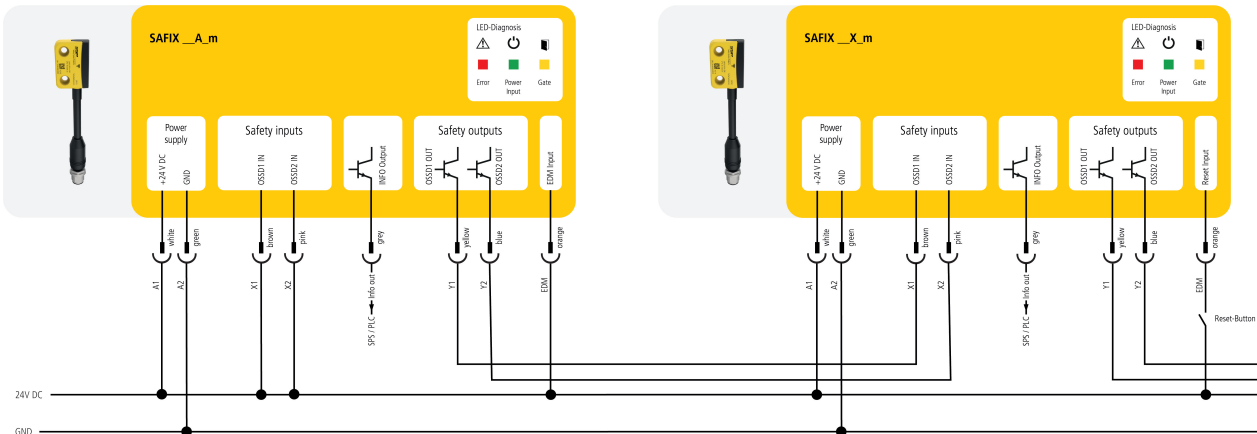

Input of a reset button + each door circuit can be acknowledged, SAFIX __X__
 Series connection of several SAFIX sensors with manual reset.
 The reset button must always be connected to the last sensor. (SAFIX __X__)
 All other sensors must be used with the automatic start variant (SAFIX __A__).

SAFIX Set I3-A-5M

Connection example 4


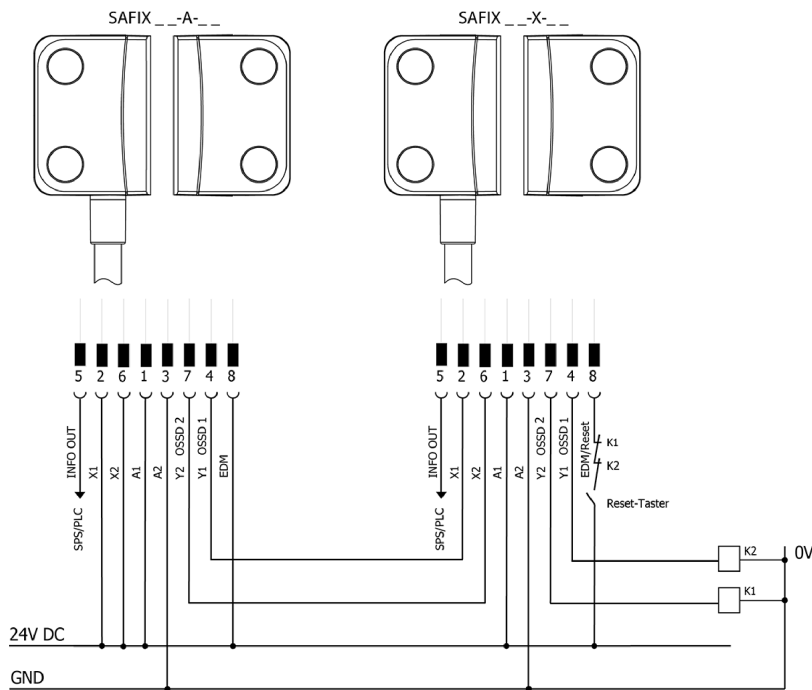


Figure 10: Direct connection of two protections according to PL e, SAFIX __-A-__ & SAFIX __-X-__
The EDM input waits for a start pulse duration between 30 ms and 5 s. The return circuits from protections K1 and K2 are also connected to the EDM input.

SAFIX Set I3-A-5M

Drawings

Assembly

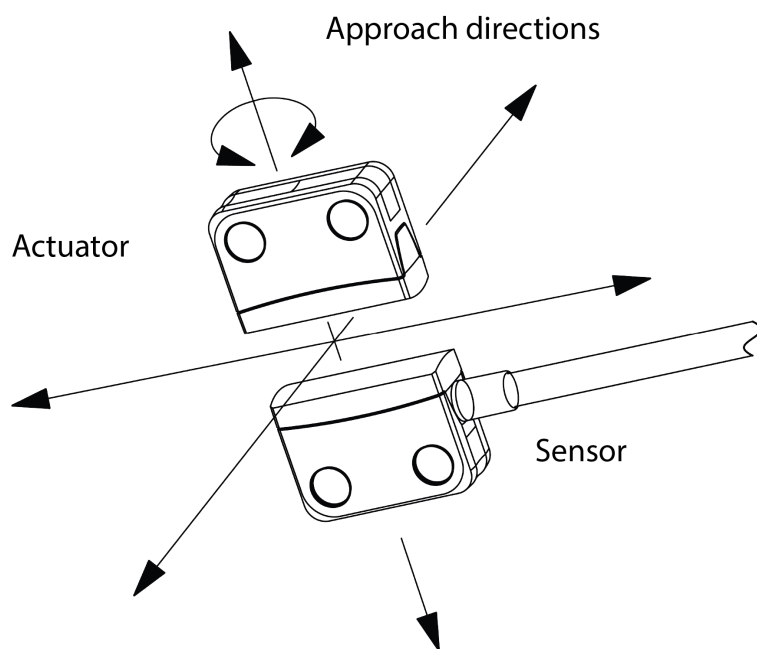

Equipment

Safe control technology

	MOSAIC M1	SP-R-11-000-00	
Standard safety relay 1 safety function	S2 series	SP-K-70-001-00	

SAFIX Set I3-A-5M

Time delay safety relay 1 safety function

T2 series

SP-K-70-001-02



Multi-function safety relay 2 safety functions

X2 series

SP-K-70-001-03



Wireless Safety

Safety Simplifier | for SAFIX

S14LDRB-H08-E2-I1-Q1A0-Q

SP-X-89-100-07

2A0-Q3C0-Q4I0-W38



Safety Simplifier | for SAFIX

S14LDRB-H09-E2-I1-I1-Q1A0-

SP-X-89-100-08

Q2A0-Q3C0-Q4I0-W39



Safety Simplifier | for SAFIX

S14LDRB-H0A-E2-I1-I1-I1-Q1

SP-X-89-100-09

A0-Q2A0-Q3C0-Q4I0-W40



Safety Simplifier | for two HOLDX R1

S14LDRB-H0A-E2-I1-I1-I1-Q1

SP-X-89-000-52

A0-Q2I0-Q3C0-Q4I0-W12



Safety Simplifier | for SAFIX

S14LDRB-H0A-E2-I1-I1-K4-Q1

SP-X-89-100-10

A0-Q2A0-Q3C0-Q4I0-W41



Safety Simplifier | S14 control cabinet unit with
external antenna connection

S14LDRX-H10-Q1A0-Q2A0-Q

SP-X-89-007-59

3A0-Q4A0



Safety switches

we simplify safety

SAFIX Set I3-A-5M

Standard-Actuator for SAFIX 3	SAFIX T5	SP-E-76-000-00	
Flat actuator for SAFIX 3	SAFIX T6	SP-E-76-000-61	
Mounting	SAFIX Z B5	SP-K-71-000-08	
Passive distributor	XCONN P6-M12-10m	SP-X-71-000-04	
Passive distributor	XCONN P6-M12-M23	SP-X-71-000-01	
Y distributor	XCONN Y2-M12	SP-X-33-000-71	
Passive distributor	XCONN P6-M12-5m	SP-X-71-000-00	

SAFIX Set I3-A-5M

Downloads

- Operating manual
- CAD Data
- SISTEMA - Data V 4.1
- Certificate
- CAD Data
- Product line
- Catalog
- Catalog packaging systems
- Certificate
- EPLAN-Data