



SSP


Safety System Products

M12-M12-C-C823-G PUR

M12-CAN-connecting cable, 8 pin, 2 m

Your advantages

To the downloads ►

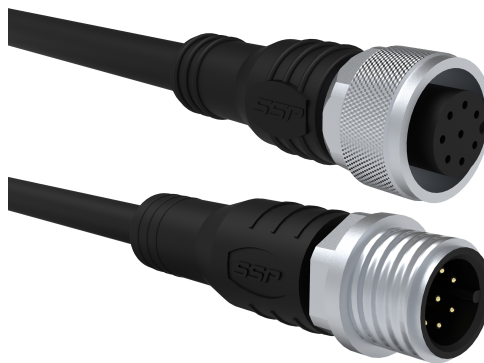

we simplify safety

M12-M12-C-C823-G PUR

8 pol. CAN Cable 2m, Connection line HOLDX R_2

General data

Type designation	M12-M12-C-C823-G PUR
Item number	SP-X-33-000-57
Master HOLDX R2	□

Safety data

Connector approval X1	IEC61076-2-101
Connector approval X2	IEC61076-2-101

Environmental conditions

Max. operating temperature	-20... +80 °C
Protection class when plugged X2	IP67


Mechanical data

Threaded ring material X2	TPU+30%GF
Shape of the plug connectors X2	M12 male connector 8-pin
Housing material X2	M12*1.0
Housing colour X2	Black
Cable length L1	2M mm
Cable sheath material K1	PUR
Colour of cable outer sheath K1	Black
Conductor cross-section K1	0,25 mm ²
Conductor material K1	tinned copper
Conductor insulation K1	PVC
Drag chain capability K1	No
Cable diameter K1	6,5 mm
Conductor cross-section AWG K1	22AWG

M12-M12-C-C823-G PUR

Electrical drawings

Pin assignment 1

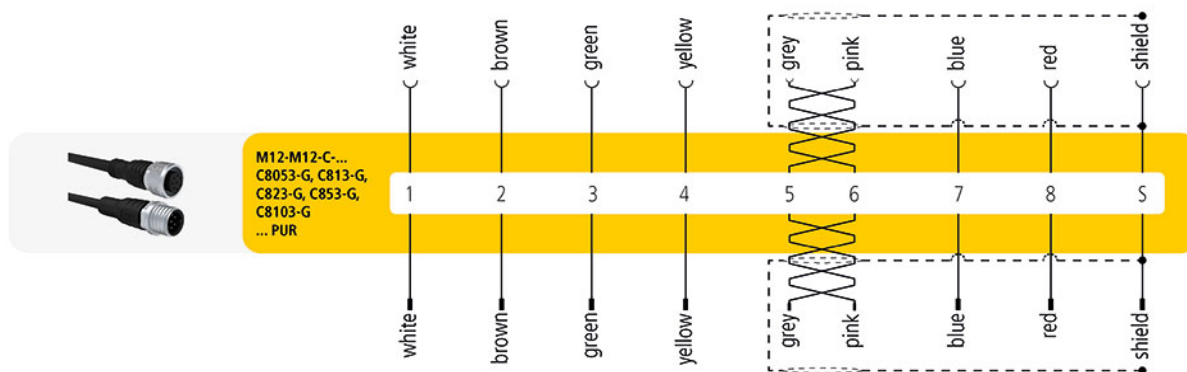

Downloads

- Product line
- EPLAN-Data