



SSP


Safety System Products

M12-M12-C-C853-G PUR

M12-CAN-connecting cable, 8 pin, 5 m

Your advantages

To the downloads ►

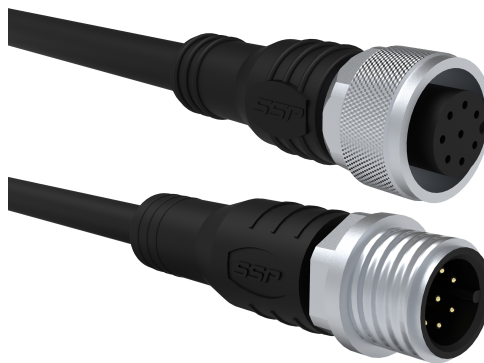

we simplify safety

M12-M12-C-C853-G PUR

8 pol. CAN Cable 5m, Connection line HOLDX R_2

General data

Type designation	M12-M12-C-C853-G PUR
Item number	SP-X-33-000-58
Wiring color K1	BN,WH,BU,BK,GY,PN,VT,OG
Master HOLDX R2	□

Safety data

Approvals	UL2464
-----------	--------

Environmental conditions

Max. operating temperature	-15...+55 °C
----------------------------	--------------

Electrical data

Pin assignment according DIN 47100

1	White
2	Brown
3	Green
4	Yellow
5	Gray
6	Pink
7	Blue
8	Red

Mechanical data


Threaded ring material X2	H59 copper
Shape of the plug connectors X2	M12 8-pin female connector
Housing material X2	PA
Housing colour X2	Black
Cable length L1	10000mm mm
Cable sheath material K1	PUR
Colour of cable outer sheathK1	Black
Conductor cross-section K1	0,34 mm²

M12-M12-C-C853-G PUR

Conductor material K1	Tinned copper
Conductor insulation K1	SR-PVC
Drag chain capability K1	No
Cable diameter K1	ø6,5 mm
Conductor cross-section AWG K1	22AWG

Electrical drawings

Pin assignment 1

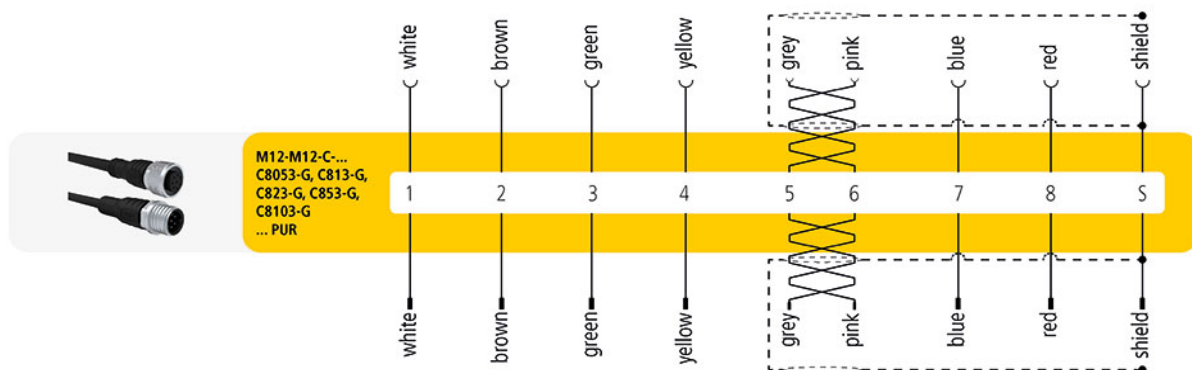

Downloads

- Product line
- EPLAN-Data