



SSP

Safety System Products

THM-RX-SMDU-NTQ+T04829X001

Safety switch with RFID locking function and emergency release

Your advantages

- Robust but slimline metal housing
- Protection class IP65
- PLd according to EN ISO 13849-1
- Modular and individual configuration
- M12-8 pin plug connection
- Safety locking for protection of personnel



To the downloads ►

we simplify safety

THM-RX-SMDU-NTQ+T04829X001

tGard offers you innovative solutions for combining safety functions and operating elements at access points to dangerous machines and plants. The compact and extremely robust metal housing provides you with the required stability and durability.

tGard can be adapted to your requirements due to its modular design. Depending on the safety requirements at your plant, you can select and combine various different safety functions such as position monitoring, locking or key transfer systems. tGard combines safety and operation. Alongside the safety functions, you can also select a diverse range of operating elements. Whether indicator lights for status reports, call and release buttons, emergency stop buttons or selection switches, you decide what you require.

General data

Functional type	Safety switch with rfid guard locking and escape release
Item number	ITM-00568919
Type designation	THM-RX-SMDU-NTQ+T04829X001
- Colour	dark gray
Service life TM (EN ISO 13849-1)	20 Years
Utilisation category for signal contacts	DC13: Le=0.5 A, Ue=24 V DC
Emergency release	Yes, 60 mm

Safety data

Category (EN ISO 13849-1:2015)	3
SIL (acc. IEC 62061)	2
Approvals	EN13849-1:2008 EN13849-2:2012 EN62061:2005 EN14119:2013

Environmental conditions

Max. operating temperature	0 ... +40 °C
Max. storage temperature	0 ... +60 °C

Electrical data

- Solenoid control	24V DC
Connection type	M12 8-pin male connector

THM-RX-SMDU-NTQ+T04829X001

Safety locking for protection of personnel	Yes
Auxiliary mechanical release	Yes
Utilisation category for safety contacts	DC13: Le=0,5 A, Ue=24 V DC AC15: Le=1 A, Ue=24 V AC


Mechanical data

Mechanical service life	1.000.000 switching cycles
Width	40 mm
Actuating force	5 to 10 NM
Locking force Fmax	2500 N
Fixing force	5 bis 10 N
UL and CSA approval	Yes

Safety System Products

Drawings

Dimensions

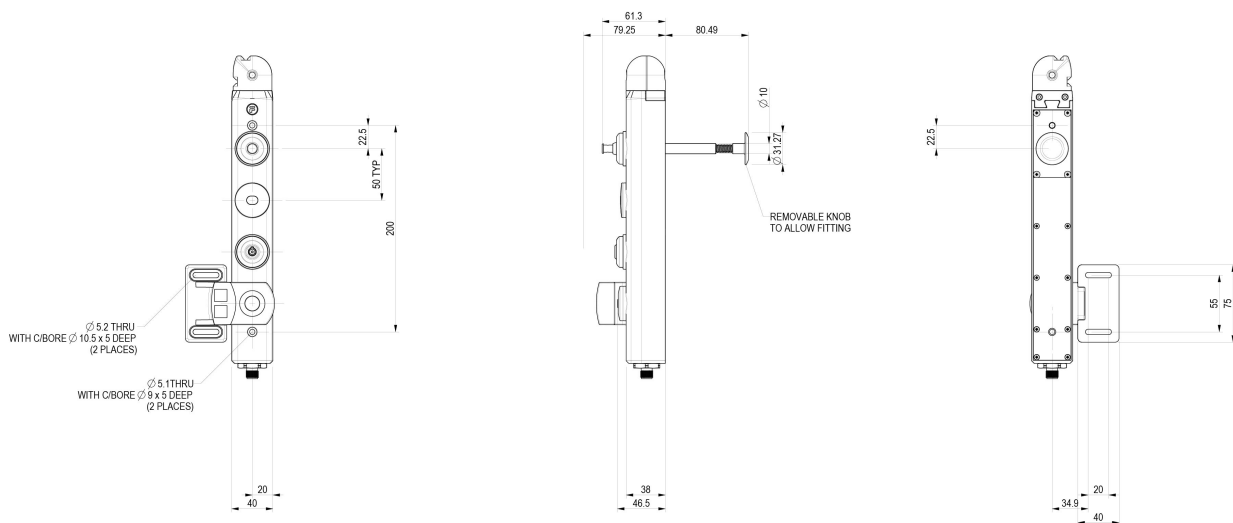

Equipment

Wireless Safety

Safety Simplifier for tGard SMDU	S14LDRB-H08-E2-I1-Q1A0-Q	SP-X-89-000-54	
	2A0-Q3C0-Q4J0-W14		
Safety Simplifier for tGard SMDU	S14LDRB-H09-E2-I1-I1-Q1A0-	SP-X-89-000-55	
	Q2A0-Q3C0-Q4J0-W15		
Safety Simplifier for tGard und and SAFIX3	S14LDRB-H09-E2-I1-I1-Q1A0-	SP-X-89-100-34	
	Q2M0-Q3C0-Q4J0-W59		

THM-RX-SMDU-NTQ+T04829X001

Safety Simplifier for tGard SMDU	S14LDRB-H0A-E2-I1-I1-I1-Q1 A0-Q2A0-Q3C0-Q4J0-W16	SP-X-89-000-56	
Safety Simplifier for tGard and SAFIX 3	S14LDRB-H0A-E2-I1-I1-I1-Q1 A0-Q2M0-Q3C0-Q4J0-W60	SP-X-89-100-35	
Safety Simplifier for tGard SMDU	S14LDRB-H0A-E2-I1-I1-K4-Q1 A0-Q2J0-Q3C0-Q4J0-W17	SP-X-89-000-57	
Safety Simplifier for two tGard SMDU	S16LDRB-H08-E2-I1-Q1A0-Q 2J0-Q3C0-Q4J0-W18	SP-X-89-000-58	
Safety Simplifier for two tGard SMDU	S16LDRB-H09-E2-I1-I1-Q1A0- Q2J0-Q3C0-Q4J0-W19	SP-X-89-000-59	
Safety Simplifier for two tGard SMDU	S16LDRB-H0A-E2-I1-I1-I1-Q1 A0-Q2J0-Q3C0-Q4J0-W20	SP-X-89-000-60	
Safety switches			
	TAF	ITM-00046007	
	TAH	ITM-00046008	

THM-RX-SMDU-NTQ+T04829X001


TAS

ITM-00046010



TEH

ITM-00046013



Downloads

- CAD Data