



SSP

Safety System Products

M8-C8201-G

M8-female connector, 8 pin, 20 m

Your advantages

To the downloads ►



we simplify safety



Safety System Products

M8-C8201-G

M8-cable, 8 Pins, 8 x 0,25 mm², 20m, M8 female connector, straight on open end

General data

Type designation	M8-C8201-G
SAFIX 1	□

Safety data

Connector approval X1	IEC61076-2-104
-----------------------	----------------

Environmental conditions

Max. operating temperature	-20 ... +80 °C
----------------------------	----------------

Electrical data

Pin assignment according DIN 47100

1	brown
2	white
3	blue
4	black
5	gray
7	purple
8	orange


Mechanical data

Housing material X1	TPU+30%GF
Cable length L1	20000 mm
Colour of cable outer sheath K1	Black
Conductor cross-section K1	0,25 mm ²
Conductor material K1	Tinned copper
Conductor insulation K1	PVC
Drag chain capability K1	No
Cable diameter K1	5,5 mm
Conductor cross-section AWG K1	24AWG

M8-C8201-G

Electrical drawings

Pin assignment 1

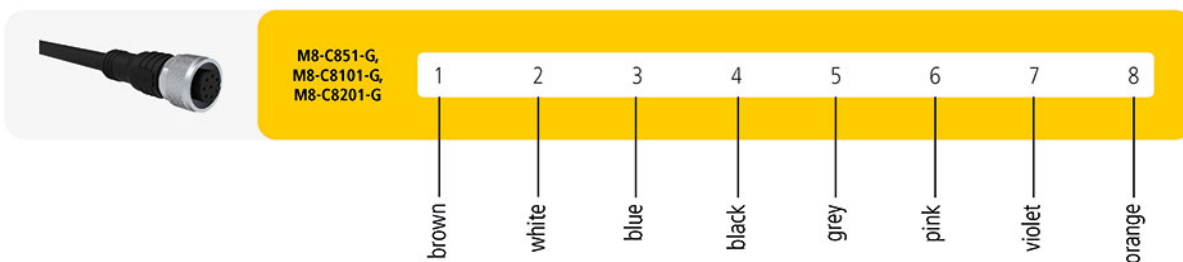

Downloads

- Product line