



SSP

Safety System Products

M8-C8201-V

M8-connection cable, 90°, 8-pin, 20 m

Your advantages

To the downloads ►



we simplify safety

M8-C8201-V

M8-female connector, 8 pin, 90°, open end - 20 m

General data

Type designation	M8-C8201-V
Item number	1022348
Item number (old)	SP-X-33-000-05
Functional type	connection cable
Codierung	A-coded
Cable length	20 m

Suitable for

SAFIX 1	□
---------	---

Safety data

Approvals	UL2464
Connector approval X1	IEC61076-2-104
IP protection	IP67

Environmental conditions

Max. operating temperature	-10~80 °C
Max. storage temperature	-10~80 °C

Electrical data

Pin assignment according DIN 47100

1	brown
2	white
3	blue
4	black
5	gray
6	pink
7	purple
8	orange
Shielding	none


M8-C8201-V

Mechanical data

Connection X1	M8
Connector type X1	female connector
Connecting direction X1	90°
Threaded ring material X1	Nickel-plated brass
Number of pins X1	8
Housing material X1	TPU+30%GF
Connection X2	open end
Cable length L1	20000 mm
Cable sheath material K1	PVC
Colour of cable outer sheathK1	Black
Conductor cross-section K1	0,25 mm ²
Conductor material K1	Tinned copper
Conductor insulation K1	PVC
Drag chain capability K1	No
Cable diameter K1	5,5 mm
Conductor cross-section AWG K1	24AWG

Electrical drawings

Pin assignment 1

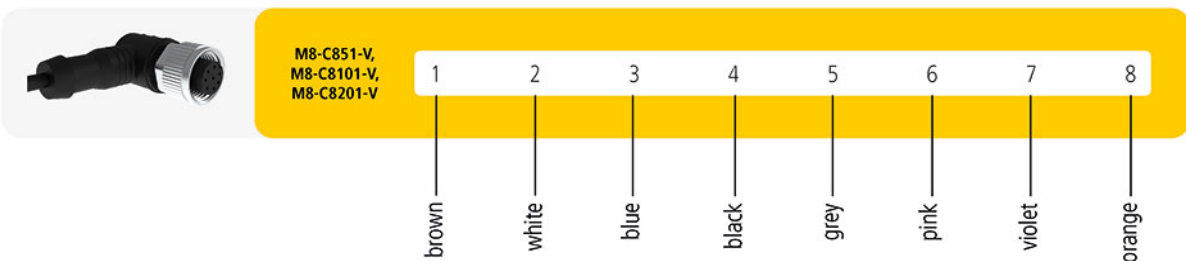

M8-C8201-V

Downloads

- Product line