



# **SSP**

---

**Safety System Products**

**M12-C12101-G**

**M12-female connector, 12 pin, 10 m**

**Your advantages**

**To the downloads ►**



**we simplify safety**

### M12-C12101-G

M12-cable, 12 pins, 12 x 0,25mm<sup>2</sup>, M12-female connector straight open end 10m

#### General data

Type designation	M12-C12101-G
SAFEGATE receiver	□
Safety Simplifier	□

#### Safety data

Connector approval X1	IEC61076-2-101
-----------------------	----------------

#### Environmental conditions


Max. operating temperature	-20 ... +80 °C
----------------------------	----------------

#### Mechanical data

Housing material X1	TPU+30%GF
Cable length L1	10000 mm
Cable sheath material K1	PVC
Colour of cable outer sheathK1	Black
Conductor cross-section K1	0,25 mm <sup>2</sup> mm <sup>2</sup>
Conductor material K1	Tinned copper
Conductor insulation K1	PVC
Drag chain capability K1	No
Cable diameter K1	6,2mm mm
Conductor cross-section AWG K1	24AWG

#### Electrical drawings

Pin assignment 1

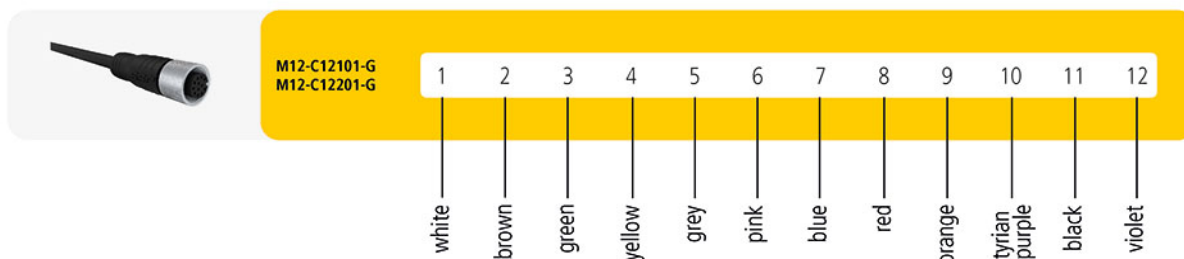

## M12-C12101-G

### Downloads

- Product line