



SSP

Safety System Products

CD50

M12-female connector, 5 pin, 50 m

Your advantages

To the downloads ►



we simplify safety

CD50

M12- cable, 5-pins, 5 x 0,34 mm², open end, 50 m

General data

Type designation	CD50
Wiring color K1	BR, WH,BL, BK, GY
EOS4 A receiver	☐
EOS transmitter	☐
SAFEGATE transmitter	☐
SAFEGATE receiver	☐
EDI B7	☐
EDI D1B	☐
EDI E1B	☐
Safety Simplifier	☐
Simplifier wireless distributor	☐

Safety data

Approvals	UL2464
-----------	--------

Environmental conditions

Max. operating temperature	-15 ... +55 °C
----------------------------	----------------

Electrical data

Pin assignment according DIN 47100

1	Brown
2	White
3	Blue
4	Black
5	Grey


Mechanical data

Conductor cross-section K1	0,34 mm ²
----------------------------	----------------------


CD50

Electrical drawings

Pin assignment 1

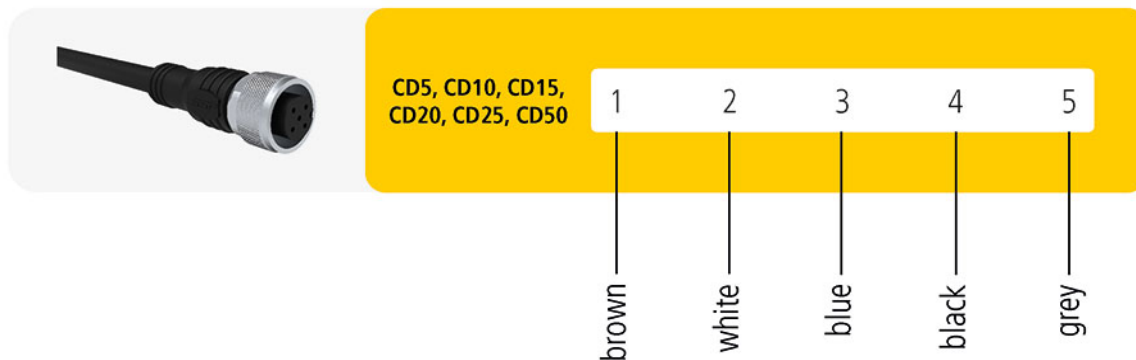


Pin assignment 2

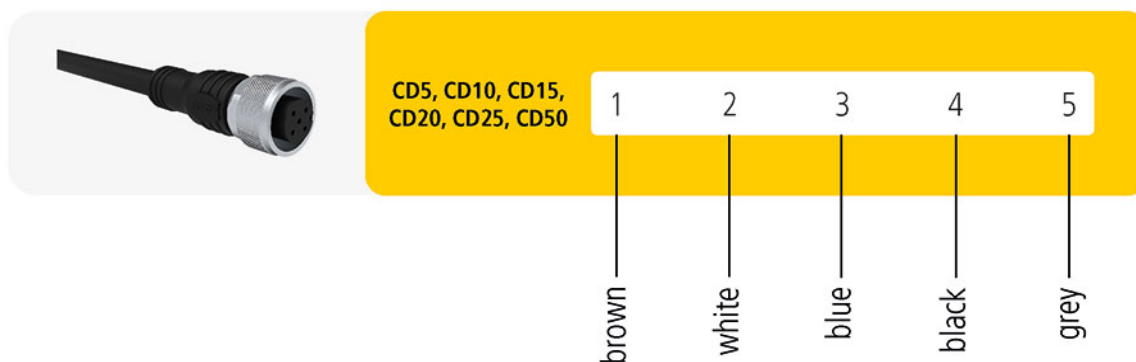

Drawings

Dimensions

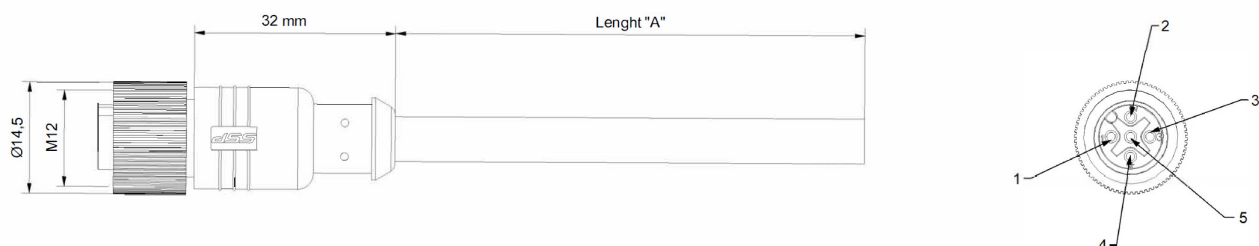

CD50

Downloads

- Product line
- EPLAN-Data