



SSP

Safety System Products

CD10

M12-female connector, 5 pin, 10 m

Your advantages

To the downloads ►



we simplify safety

CD10

M12 cable, 5 Pins, 5 x 0,34 mm², open end, 10 m

General data

Type designation	CD10
Wiring color K1	BN,WH,BU,BK,GY
EOS4 A receiver	□
EOS transmitter	□
SAFEGATE transmitter	□
EDI B7	□
EDI D1B	□
EDI E1B	□
Safety Simplifier	□
Simplifier wireless distributor	□

Safety data

Approvals	UL2464
-----------	--------

Environmental conditions

Max. operating temperature	-15 ... +55 °C
----------------------------	----------------

Electrical data

1	Brown
2	White
3	Blue
4	Black
5	Grey


Mechanical data

Conductor cross-section K1	0,34 mm ²
----------------------------	----------------------


CD10

Electrical drawings

Pin assignment 1

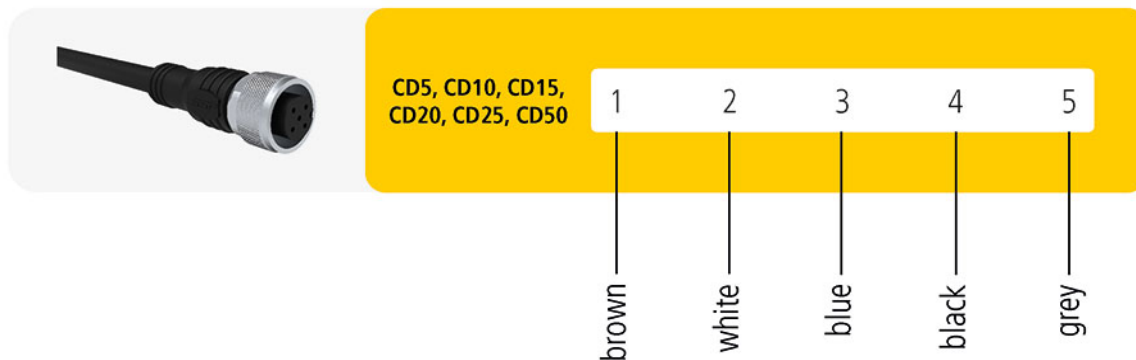


Pin assignment 2

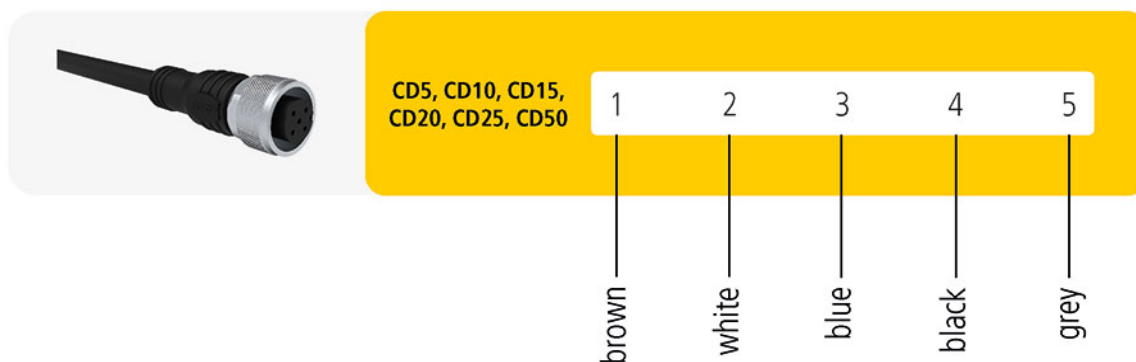

Drawings

Dimensions

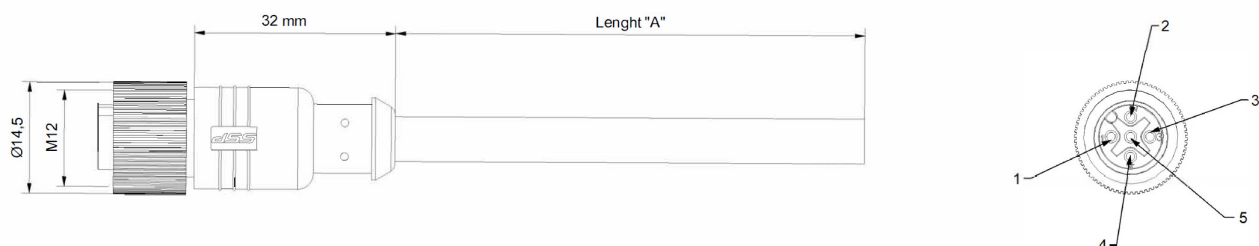

CD10

Downloads

- Product line
- EPLAN-Data