



SSP

Safety System Products

C8D10

M12-female connector, 8 pin, 10 m

Your advantages

To the downloads ►



we simplify safety

C8D10

M12-cable, 8-pins, 8 x 0,34 mm², open end, 10 m

General data

Type designation	C8D10
Wiring color K1	WH,BN,GN,YW,GY,PK,BU,RD
HOLDX R1	☐
Master HOLDX R2	☐
SAFIX 3	☐
ATOM	☐
EOS4 X receiver	☐
EDI B7B	☐
EDI C7	☐
EDI E1B	☐
Safety Simplifier	☐
Simplifier wireless distributor	☐
XCONN	☐

Safety data

Approvals	UL2464
-----------	--------

Environmental conditions

Max. operating temperature	-15°C to +55°C °C
----------------------------	-------------------

Electrical data

Pin assignment according DIN 47100

1	White
2	Brown
3	Green
4	Yellow
5	Gray
6	Pink
7	Blue
8	Red

C8D10

Mechanical data

Conductor cross-section K1	0,34 mm ²
----------------------------	----------------------

Electrical drawings

Pin assignment 1




C8...
D5, D10, D15,
D25, D40


1	2	3	4	5	6	7	8
white	brown	green	yellow	grey	pink	blue	red

Drawings

Dimensions

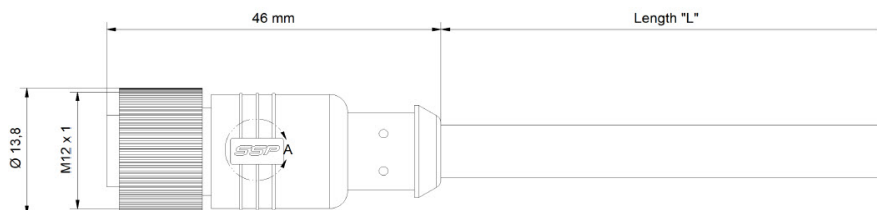

Vorne Ansicht / Front View



Links Ansicht / Left View

Downloads

- Product line
- EPLAN-Data