



SSP

Safety System Products

SAFIX T5

Standard-Actuator for SAFIX 3

Your advantages

- Small compact design

[To the downloads ►](#)



we simplify safety

SAFIX T5

The new SAFIX 3 RFID safety sensor impresses due to its compact design and a hole distance of 22 mm.

It can be actuated from the front and both sides and is available in 3 different versions with a choice of low level or high level coding according to EN ISO 14419.

The sensor has protection class IP69K, holds an ECOLAB approval.

General data

Type designation	SAFIX T5
Item number	SP-E-76-000-00
Functional type	RFID Safety Sensor, Standard Actuator
Service life TM (EN ISO 13849-1)	20 Years


Safety data

Performance Level (EN ISO 13849)	PLe
Category (EN ISO 13849-1:2015)	cat. 4
SIL (acc. IEC 62061)	SIL3, SILCL3
Approvals	TÜV_SÜD, CE

SAFIX T5

Drawings

Approach

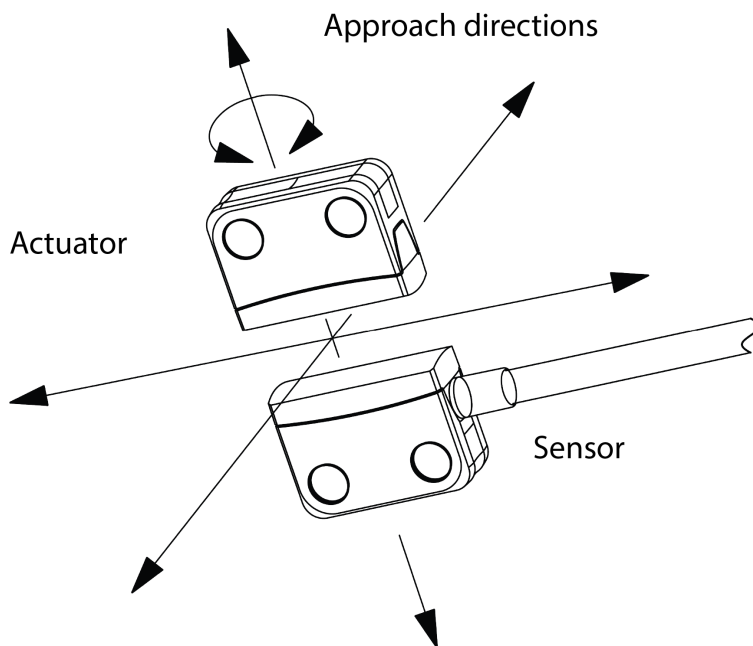

Equipment

Safety switches

Passive distributor

XCONN P6-M12-10m

SP-X-71-000-04



Passive distributor

XCONN P6-M12-M23

SP-X-71-000-01



SAFIX T5

Passive distributor

XCONN P6-M12-5m

SP-X-71-000-00



Downloads

- Operating manual
- CAD-Data
- Product line
- Catalog
- EPLAN-Data
- Certificate