



SSP


Safety System Products

SAFIX T3

Standard-actuator for SAFIX 1

Your advantages

- PLe according to EN ISO 13849-1
- Series connection of up to 80 sensors without reduction in safety
- No increase in the response times with series connection
- No special analysis system required
- LED diagnosis
- Single information signal for diagnosis
- Highly coded according to EN ISO 14119 (version I1 and W1)
- Small compact design



To the downloads ►

we simplify safety

SAFIX T3

Highly coded in a compact design – the latest RFID technology

The SAFIX safety sensors from the company SSP not only impress because of their compact design but also due to their use of the latest RFID technology. Available in 3 different versions with a choice of lower or higher levels of coding according to EN ISO 14119, they offer a high level of protection against manipulation.

SAFIX can be switched in series up to 80 times without any significant increase in response time and can thus be integrated into systems with the highest safety levels (PL_e according to ISO 13849-1). Thanks to the 8-pole M8 connector and its OSSD output signals, the SAFIX can be connected to all manner of safety relays and thus perfectly integrated into the existing environment. A three colour LED display offers user-friendly diagnosis and enables fast maintenance and commissioning. The flat actuator means that SAFIX can be quickly and easily installed on a wide variety of applications, irrespective of whether it is a swing door, lifting gate or aluminium profile. Thanks to the 8-pole M8 connector and its OSSD output signals, the SAFIX can be connected to all manner of safety relays and thus perfectly integrated into the existing environment.

A three colour LED display offers user-friendly diagnosis and enables fast maintenance and commissioning. The flat actuator means that SAFIX can be quickly and easily installed on a wide variety of applications, irrespective of whether it is a swing door, lifting gate or aluminium profile.

General data

Type designation	SAFIX T3
Functional type	RFID safety sensor, standard coding
Item number	SP-K-70-000-03
Service life TM (EN ISO 13849-1)	20 Years

Safety data

PFHd (EN ISO 13849)	6,8 x 10 ⁻¹⁰ /h
Category (EN ISO 13849-1:2015)	cat. 4
SIL (acc. IEC 62061)	SIL3, SILCL3
Approvals	TÜV_SÜD, CE

Environmental conditions

Max. storage temperature	-25... +85 °C
--------------------------	---------------

SAFIX T3

Max. operating temperature -25 ... +65 °C

Electrical data


Electrical service life (nominal load)	20 Years
--	----------

Mechanical data

Mounting	without mounting set, with 20 mm screws
Housing material	Plastic, thermoplast

Drawings

Dimensions

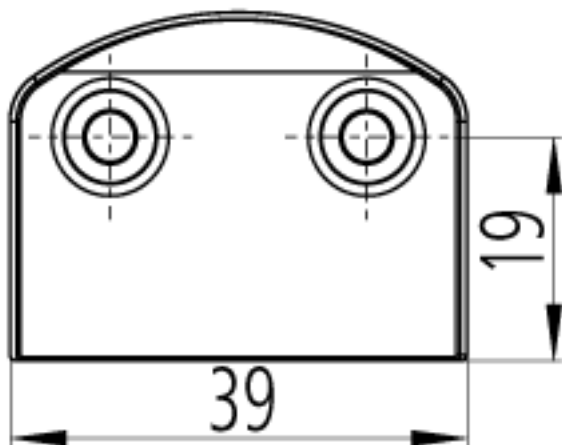

Equipment

Safety switches

RFID Safety Sensor, high coded, autom. reset, M8	SAFIX I1	SP-K-70-000-01
--	----------	----------------



RFID Safety Sensor, lowcoded, autom. reset, M8	SAFIX S1	SP-K-70-000-00
--	----------	----------------



SAFIX T3

RFID Safety Sensor, high coded (reteach.), autom.

SAFIX W1

SP-K-70-000-02



reset, M8

Mounting

SAFIX Z B5

SP-K-71-000-08



Passive distributor

XCONN P6-M12-M23

SP-X-71-000-01



Passive distributor

XCONN P6-M12-5m

SP-X-71-000-00



Downloads

- Certificate
- Product line
- Catalog