



SSP


Safety System Products

Selector switch G6

3 Positions, latching, 2 x NO

Your advantages

To the downloads ►



we simplify safety

Selector switch G6

- Unlit
- latching
- Contact 2 x NO
- without labeling

General data

Item number	SP-X-88-000-28
Type designation	Simplifier G6
Labelling	Without
Number switch positions	3
Switching mode	latching
Installation opening button	Ø 0.88 in / Ø 22.3 mm

Safety data

Approvals	CE
-----------	----

Electrical data

Bounce time NC	<10 ms
mechanical lifespan	1.000.000 switching cycles
Rated operating voltage U _e	24 V
Rated operating current I ₀	0.25 A
Switch type	Turnkey (NO) 2
Illumination	No
electrical lifespan	1.000.000 switching cycles
Switching capacity	10 I _e
Continuous thermal current	5 A
Connecting typ	spring balancer clamp
Number of pins	6

Wire size

Single - wire	28...20 AWG / 0.08...0.5 mm ²
Fine - wire	28...20 AWG / 0.08...0.5 mm ²
Fine - wire (wire end ferrule with plastic collar)	0.25 mm ² / 24 AWG
Fine - wire (wire end ferrule without plastic collar)	0.25 mm ² / 24 AWG

Selector switch G6

Wire stripping	5...6 mm / 0.2...0.24 in
----------------	--------------------------


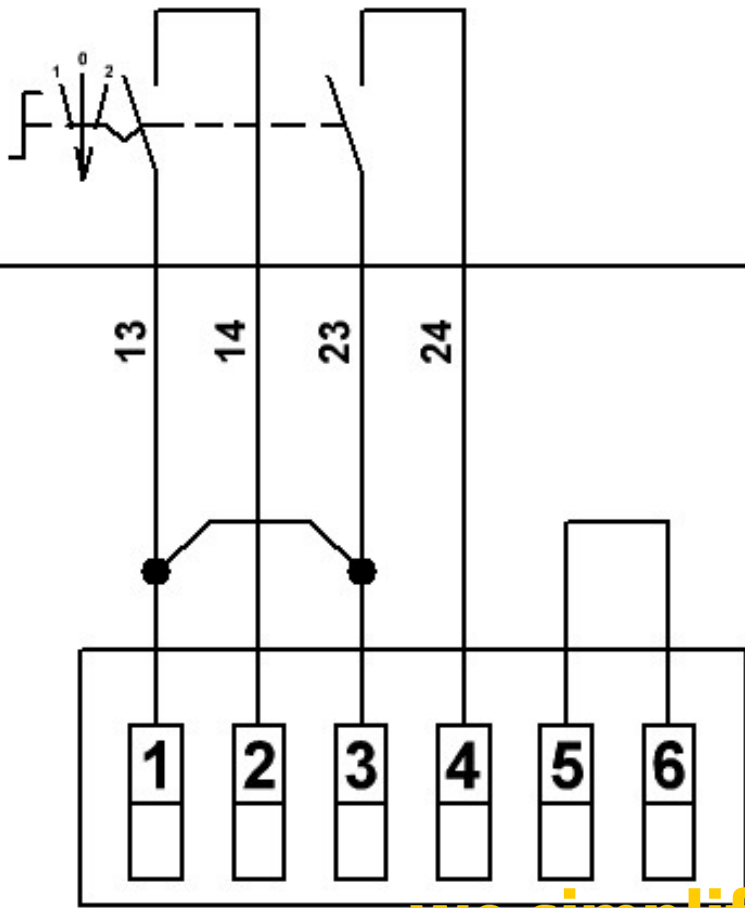
Mechanical data

Torque (mounting nut)	1.5...1.9 Nm
-----------------------	--------------

Electrical drawings

Selector switch G6

Connection example 1

Artikelcode	Wahlschalter 3 Positionen rastend G6
	 
SP-X-88-000-28	we simplify

Selector switch G6

Downloads

- Touch Panel
- Product line