



SSP


Safety System Products

Selector switch G5

3 Positions, non-latching, 2 x NO

Your advantages

To the downloads ►



we simplify safety

Selector switch G5

- Unlit
- non-latching
- Contact 2 x NO
- without labeling

General data

Item number	SP-X-88-000-27
Type designation	Simplifier G5
Labelling	Without
Number switch positions	3
Switching mode	non-latching
Installation opening button	Ø 0.88 in / Ø 22.3 mm

Safety data

Approvals	CE
-----------	----

Electrical data

Bounce time	<10
mechanical lifespan	1.000.000 switching cycles
Rated operating voltage U _e	24 V
Rated operating current I ₀	0.25 A
Switch type	Turnkey (NO) 2
Illumination	No
electrical lifespan	1.000.000 switching cycles
	<20 mOhm
Switching capacity	10 I _e
Continuous thermal current	5 A
Connecting typ	spring balancer clamp
Number of pins	6

Wire size

Single - wire	28...20 AWG / 0.08...0.5 mm ²
Fine - wire	28...20 AWG / 0.08...0.5 mm ²
Fine - wire (wire end ferrule with plastic collar)	0.25 mm ² / 24 AWG

Selector switch G5

Fine - wire (wire end ferrule without plastic collar)	0.25 mm ² / 24 AWG
Wire stripping	5...6 mm / 0.2...0.24 in


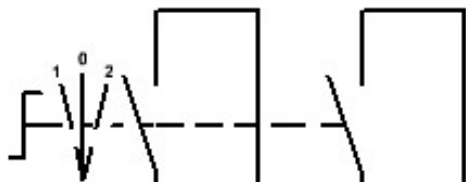
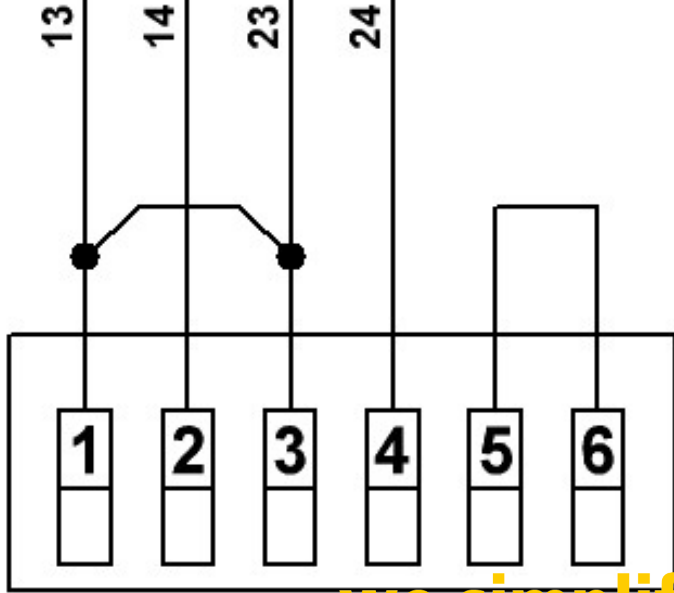
Mechanical data

Torque (mounting nut)	1.5...1.9 Nm
-----------------------	--------------

Electrical drawings

Selector switch G5

Connection example 1

Artikelcode	Wahlschalter 3 Positionen tastend G5  
SP-X-88-000-27	 we simplify

Selector switch G5

Downloads

- Touch Panel
- Product line