



SSP

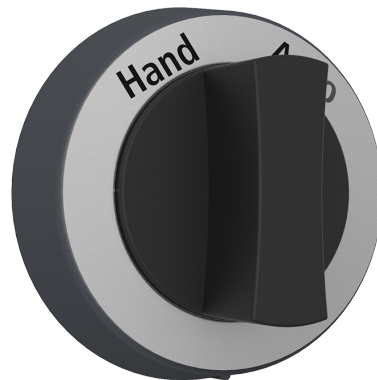
Safety System Products

Selector switch G14

3 Positions, non-latching, 2 x NO

Your advantages

To the downloads ►



we simplify safety

Selector switch G14

- Unlit
- non-latching
- Contact 2 x NO
- Individual labeling

General data

Item number	SP-X-88-000-36
Type designation	Simplifier G14
Labelling	Individual
Number switch positions	3
Switching mode	non-latching
Installation opening button	Ø 0.88 in / Ø 22.3 mm

Electrical data

Bounce time	<10
mechanical lifespan	1.000.000 switching cycles
Rated operating voltage U _e	24 V
Rated operating current I _∞	0.25 A
Switch type	Turnkey (NO) 2, LED 1
Illumination	LED
electrical lifespan	1.000.000 switching cycles
Switching capacity	10 I _e
Continuous thermal current	5 A
Connecting typ	Spring balancer clamp
Number of pins	6

Wire size

Single - wire	28...20 AWG / 0.08...0.5 mm ²
Fine - wire	28...20 AWG / 0.08...0.5 mm ²
Fine - wire (wire end ferrule with plastic collar)	0.25 mm ² / 24 AWG
Fine - wire (wire end ferrule without plastic collar)	0.25 mm ² / 24 AWG
Wire stripping	1.5...1.9 Nm

Mechanical data

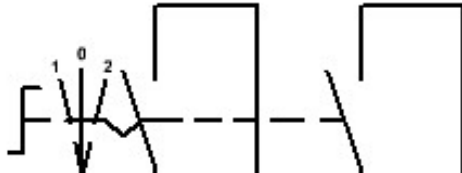
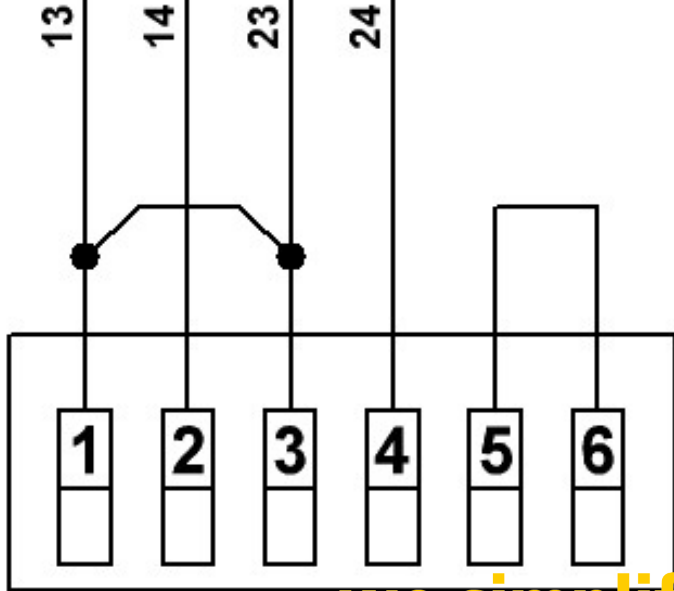
Torque (mounting nut)	1.5...1.9 Nm
-----------------------	--------------

Selector switch G14

Electrical drawings

Selector switch G14

Connection example 1

Artikelcode	Wahlschalter 3 Positionen rastend Individuelle Beschriftung G14  
SP-X-88-000-36	

Selector switch G14

Downloads

- Touch Panel
- Product line