



SSP


Safety System Products

Keyswitch K2

3 Positions, latching, 2 x NO

Your advantages

To the downloads ►

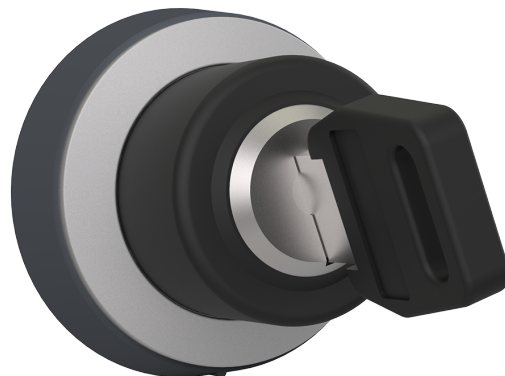

we simplify safety

Keyswitch K2

- latching
- Contact 2 x NO
- Without labeling

General data

Item number	SP-X-88-000-46
Type designation	Simplifier K2
Labelling	Without
Number switch positions	3
Switching mode	latching
Installation opening button	Ø 0.88 in / Ø 22.3 mm

Safety data

Approvals	CE
-----------	----

Electrical data

Bounce time	<10
mechanical lifespan	1.000.000 switching cycles
Rated operating voltage U _e	24 V
Rated operating current I _□	0.25 A
Switch type	Turnkey (NO) 2
Illumination	No
electrical lifespan	1.000.000 switching cycles
	<20 mOhm
Switching capacity	10 I _e
Continuous thermal current	5 A
Connecting typ	Spring balancer clamp
Number of pins	6

Wire size

Single - wire	28...20 AWG / 0.08...0.5 mm ²
Fine - wire	28...20 AWG / 0.08...0.5 mm ²
Fine - wire (wire end ferrule with plastic collar)	0.25 mm ² / 24 AWG
Fine - wire (wire end ferrule without plastic collar)	0.25 mm ² / 24 AWG

Keyswitch K2

Wire stripping 5...6 mm / 0.2...0.24 in


Mechanical data

Torque (mounting nut)	1.5...1.9 Nm
-----------------------	--------------

Electrical drawings

Keyswitch K2

Connection example 1

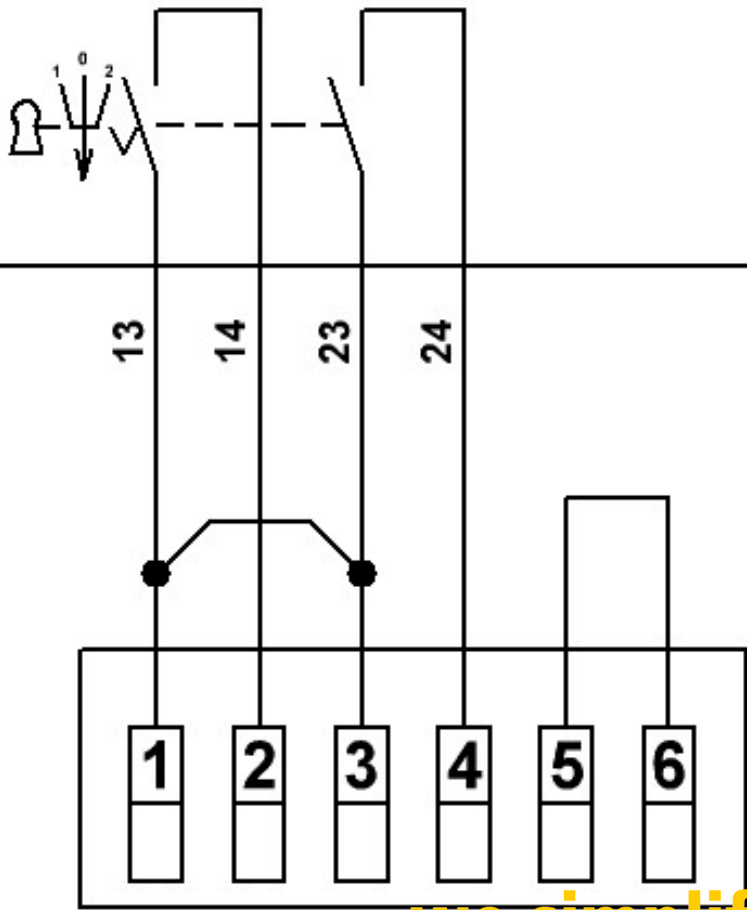Artikelcode SP-X-88-000-46	Schlüsselschalter 3 Positionen rastend K2
	 

Keyswitch K2

Downloads

- Touch Panel
- Product line