



SSP

Safety System Products

Keyswitch K4

2 Positions, latching, 2 x NO

Your advantages

To the downloads ►



we simplify safety

Keyswitch K4

- latching
- Contact 2 x NO
- Without labeling

General data

Item number	SP-X-88-000-48
Type designation	Simplifier K4
Labelling	Without
Number switch positions	2
Switching mode	latching
Installation opening button	Ø 0.88 in / Ø 22.3 mm

Safety data

Approvals	CE
-----------	----

Electrical data

Bounce time	<10
mechanical lifespan	1.000.000 switching cycles
Rated operating voltage U _e	24 V
Rated operating current I _□	0.25 A
Switch type	Turnkey (NO) 2
Illumination	No
electrical lifespan	1.000.000 switching cycles
	<20 mOhm
Switching capacity	10 I _e
Continuous thermal current	5 A
Connecting typ	Spring balancer clamp
Number of pins	6
Wire size	
Single - wire	28...20 AWG / 0.08...0.5 mm ²
Fine - wire	28...20 AWG / 0.08...0.5 mm ²
Fine - wire (wire end ferrule with plastic collar)	0.25 mm ² / 24 AWG
Fine - wire (wire end ferrule without plastic collar)	0.25 mm ² / 24 AWG

Keyswitch K4

Wire stripping 5...6 mm / 0.2...0.24 in

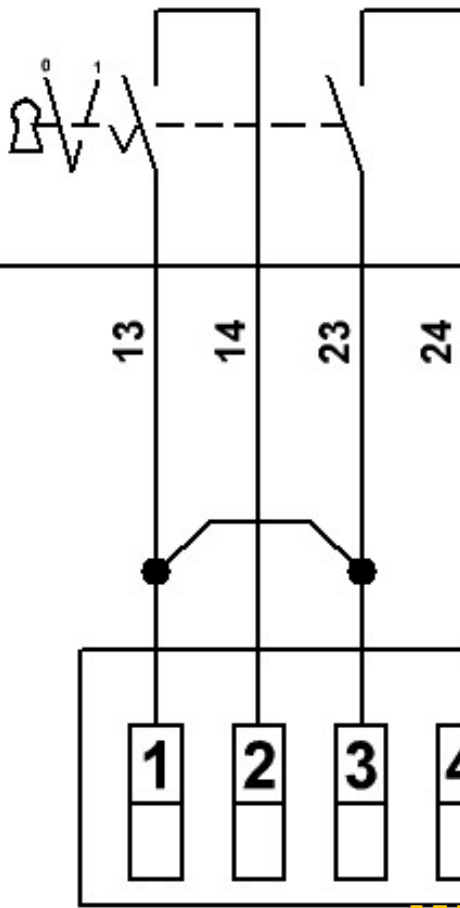
Mechanical data

Torque (mounting nut)	1.5...1.9 Nm
-----------------------	--------------

Electrical drawings

Keyswitch K4

Connection example 1

Artikelcode	Schlüsselschalter 2 Positionen rastend	K4
		
SP-X-88-000-48		

Keyswitch K4

Downloads

- Touch Panel
- Product line
- Operating Instructions