



SSP

Safety System Products

Keyswitch K6

3 Positions, latching, 2 x NO

Your advantages

To the downloads ►



we simplify safety

Keyswitch K6

- latching
- Contact 2 x NO
- Individual labeling

General data

Item number	SP-X-88-000-50
Type designation	Simplifier K6
Labelling	Individual
Number switch positions	3
Switching mode	latching
Installation opening button	Ø 0.88 in / Ø 22.3 mm

Safety data

Approvals	CE
-----------	----

Electrical data

Bounce time	<10
mechanical lifespan	1.000.000 switching cycles
Rated operating voltage U _e	24 V
Rated operating current I _□	0.25 A
Switch type	Turnkey (NO) 2
Illumination	No
electrical lifespan	1.000.000 switching cycles
	<20 mOhm
Switching capacity	10 I _e
Continuous thermal current	5 A
Connecting typ	Spring balancer clamp
Number of pins	6

Wire size

Single - wire	28...20 AWG / 0.08...0.5 mm ²
Fine - wire	28...20 AWG / 0.08...0.5 mm ²
Fine - wire (wire end ferrule with plastic collar)	0.25 mm ² / 24 AWG
Fine - wire (wire end ferrule without plastic collar)	0.25 mm ² / 24 AWG

Keyswitch K6

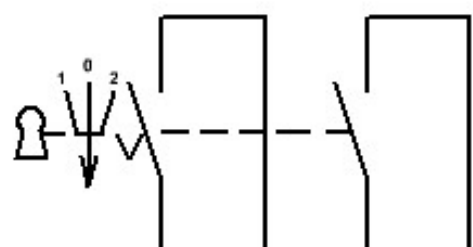
Mechanical data

Torque (mounting nut)	1.5...1.9 Nm
-----------------------	--------------

Electrical drawings

Keyswitch K6

Connection example 1

Artikelcode SP-X-88-000-50	Schlüsselschalter 3 Positionen rastend Individuelle Beschriftung K6  
---	---

Keyswitch K6

Downloads

- [Touch Panel](#)
- [Product line](#)
- [Operating Instructions](#)