



SSP

Safety System Products

Keyswitch K7

2 Positions, non-latching, 2 x NO

Your advantages

To the downloads ►



we simplify safety

Keyswitch K7

- non-latching
- Contact 2 x NO
- Individual labeling

General data

Item number	SP-X-88-000-51
Type designation	Simplifier K7
Labelling	Individual
Number switch positions	2
Switching mode	non-latching
Installation opening button	Ø 0.88 in / Ø 22.3 mm

Electrical data

mechanical lifespan	1.000.000 switching cycles
Rated operating voltage U _e	24 V
Rated operating current I _∞	0.25 A
Switch type	Turnkey (NO) 2
Illumination	No
electrical lifespan	1.000.000 switching cycles
	<20 mOhm
Switching capacity	10 I _e
Connecting typ	Spring balancer clamp
Number of pins	6

Wire size

Single - wire	28...20 AWG / 0.08...0.5 mm ²
Fine - wire	28...20 AWG / 0.08...0.5 mm ²
Fine - wire (wire end ferrule with plastic collar)	0.25 mm ² / 24 AWG
Fine - wire (wire end ferrule without plastic collar)	0.25 mm ² / 24 AWG
Wire stripping	5...6 mm / 0.2...0.24 in

Mechanical data

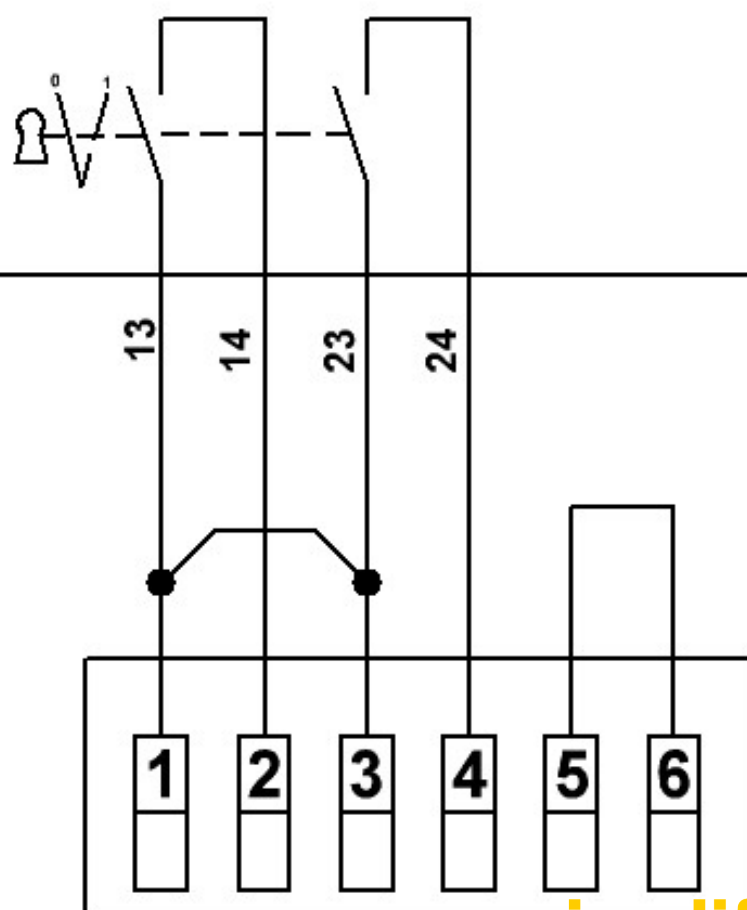
Torque (mounting nut)	1.5...1.9 Nm
-----------------------	--------------

Keyswitch K7

Electrical drawings

Keyswitch K7

Connection example 1

Artikelcode SP-X-88-000-51	Schlüsselschalter 2 Positionen tastend Individuelle Beschriftung K7  
---	--

Keyswitch K7

Downloads

- [Touch Panel](#)
- [Product line](#)
- [Operating Instructions](#)