



SSP


Safety System Products

Button Green P4

Unlit 1 x NO

Your advantages

To the downloads ►

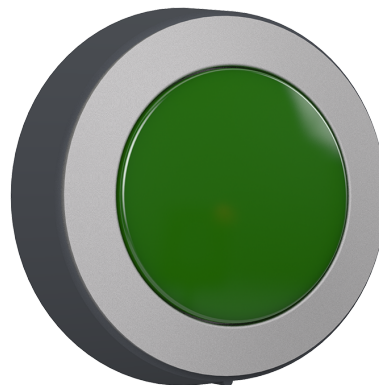

we simplify safety

Button Green P4

- Unlit
- Push button green
- Safety relay 1x NO

General data

Item number	SP-X-88-000-06
Installation opening button	Ø 0.88 in / Ø 22.3 mm
Type designation	P4
Colour	Green

Safety data

Approvals	CE
-----------	----

Electrical data

Rated operating voltage U _e	24 V
Rated operating current I ₀	0.25 A
	<50 mOhm (AU)
Switch type	Closer (NO) 1
Bounce time	<10 ms
Switching capacity	10 I _e
Continuous thermal current	5 A
Illumination	No
mechanical lifespan	1.000.000 switching cycles
Connecting typ	spring balancer clamp
Number of pins	6

Wire size

Single - wire	28...20 AWG / 0.08...0.5 mm ²
Fine - wire	28...20 AWG / 0.08...0.5 mm ²
Fine - wire (wire end ferrule with plastic collar)	0.25 mm ² / 24 AWG
Fine - wire (wire end ferrule without plastic collar)	0.25 mm ² / 24 AWG
Wire stripping	5...6 mm / 0.2...0.24 in
electrical lifespan	1.000.000 switching cycles

Button Green P4


Mechanical data

Torque (mounting nut)

1.5...1.9 Nm

Electrical drawings

Connection example 1

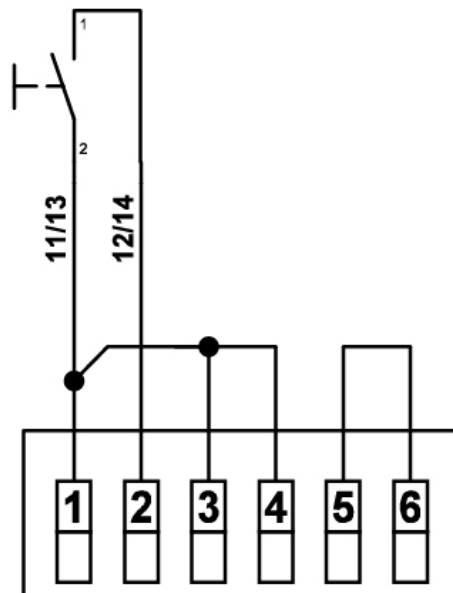

Equipment


Wireless Safety

Article code ZTK6

Button cap sets for unlit

SP-X-88-001-19

buttons




Inscription label set ZB1

SP-X-88-001-21



Button Green P4

	Inscription label set ZB2	SP-X-88-001-22	
	Inscription label set ZB3	SP-X-88-001-23	
	Inscription label set ZB4	SP-X-88-001-93	
Article code ZMT	Installation wrench	SP-X-88-001-25	
Article code ZUK	Liftingtool for button and light caps	SP-X-88-001-26	

Downloads

- Product line
- Operating Instructions