




SSP
Safety System Products

Emergency- Stop Button E1

Your advantages

To the downloads ►

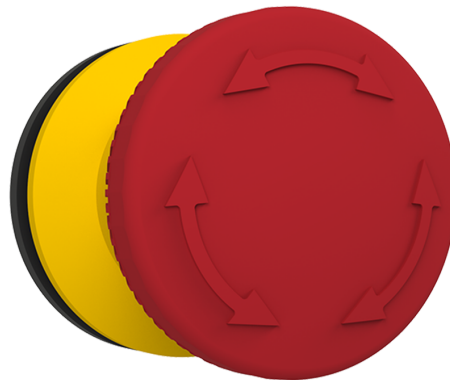

we simplify safety

Emergency- Stop Button E1

- Standard
- [rotary release](#)
- Safety Contact 2x NC

General data

Item number	SP-X-88-000-01
Type designation	E1

Electrical data

Bounce time	<10ms
Bounce time NC	<10ms ms
mechanical lifespan	50.000 switching cycles
B10d- Value	250.000
Rated operating voltage U _e	24 V
Rated operating current I ₀	0.25 A
Switch type	2 Openers
Illumination	No
	<50 mOhm (AU)
Break contact force opening	According to EN60947-5-1, Appendix K
electrical lifespan	50.000 switching cycles
Switching capacity	10 I _e
Continuous thermal current	5 A
Unlocking	right- and left-hand
Connecting typ	spring balancer clamp
Number of pins	6

Wire size


Single - wire	28...20 AWG / 0.08...0.5 mm ²
Fine - wire	28...20 AWG / 0.08...0.5 mm ²
Fine - wire (wire end ferrule with plastic collar)	0.25 mm ² / 24 AWG
Fine - wire (wire end ferrule without plastic collar)	0.25 mm ² / 24 AWG
Wire stripping	5...6 mm / 0.2...0.24 in

Emergency- Stop Button E1

Electrical drawings

Emergency- Stop Button E1

Connection example 1

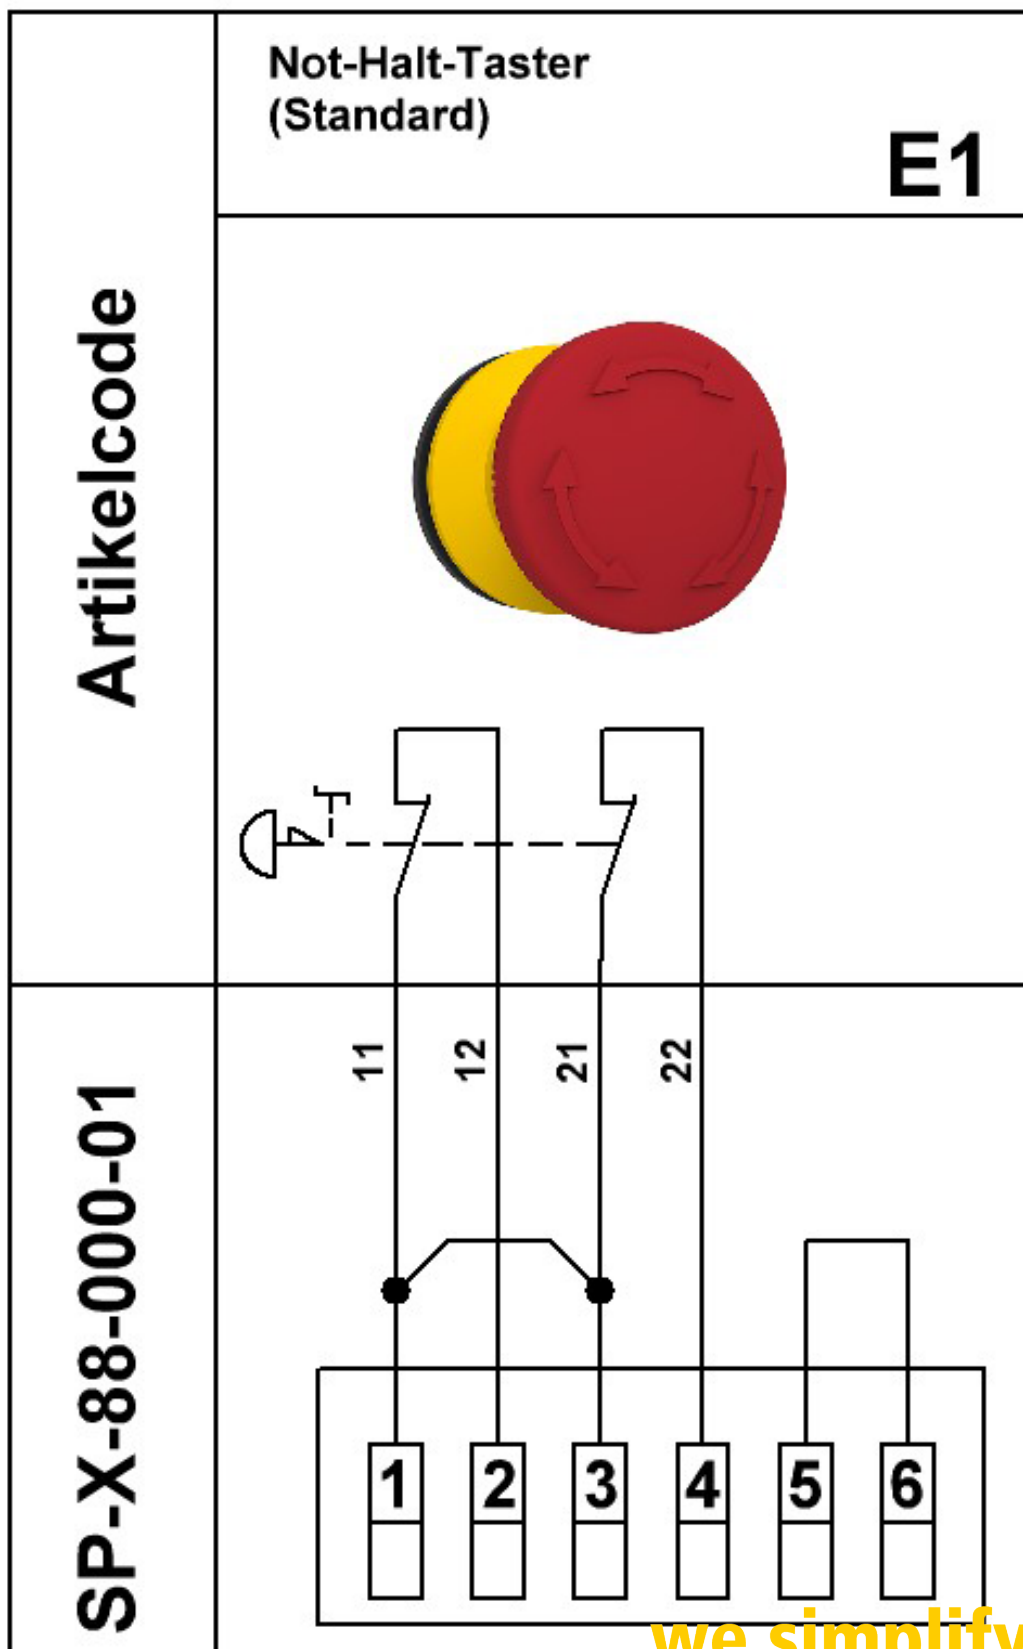

we simplify safety

Emergency- Stop Button E1

Downloads

- Touch Panel
- Product line