



SSP

Safety System Products

Keyswitch KJ

2 Positions, latching, 1 x NO + 1NC

Your advantages

[To the downloads ►](#)



we simplify safety

Keyswitch KJ

- latching
- Contact 1 x NO + 1NC
- Individual labeling

General data

Item number	SP-X-88-001-02
Number switch positions	2
Switching mode	latching
Labelling	Individual
Installation opening button	Ø 0.88 in / Ø 22.3 mm
Type designation	KJ

Safety data

Approvals	CE
-----------	----

Electrical data

Rated operating voltage U _e	24 V
Rated operating current I _Δ	0.25 A
	<20 mOhm
Switch type	1 Opener (NO) / 1 Closer (NC)
Switching capacity	10 I _e
Continuous thermal current	5 A
Illumination	No
mechanical lifespan	1.000.000 switching cycles
B10d- Value	150.000
Lambda-d	20 %
Connecting typ	Spring balancer clamp
Number of pins	6

Wire size

Single - wire	28...20 AWG / 0.08...0.5 mm ²
Fine - wire	28...20 AWG / 0.08...0.5 mm ²
Fine - wire (wire end ferrule with plastic collar)	0.25 mm ² / 24 AWG
Fine - wire (wire end ferrule without plastic collar)	0.25 mm ² / 24 AWG


Keyswitch KJ

Mechanical data

Torque (mounting nut)	1.5...1.9 Nm
-----------------------	--------------

Electrical drawings

Connection example 1

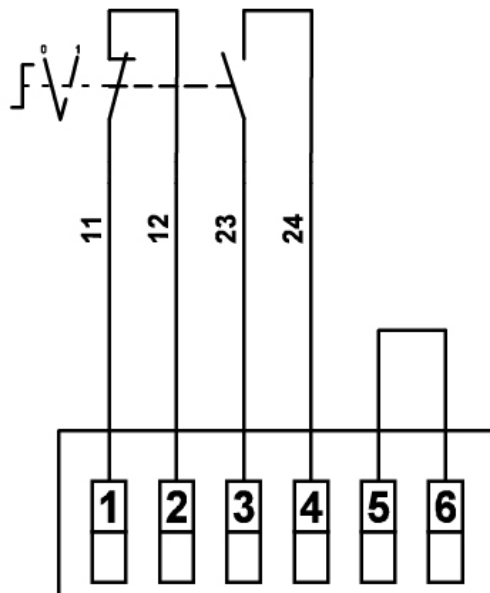

Downloads