



SSP


Safety System Products

Button Red P2

Pushbutton, unlit, safety contact 1x NO

Your advantages

To the downloads ►

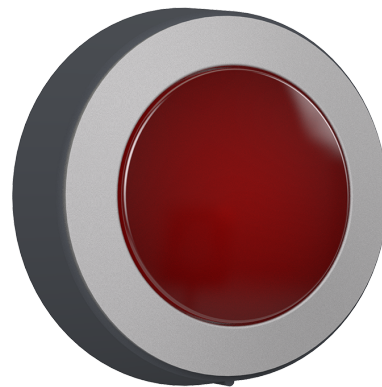

we simplify safety

Button Red P2

- Unlit
- Pushbutton red
- Safety contact 1 x NO

General data

Item number	SP-X-88-000-04
Type designation	Button P2
Installation opening button	Ø 0.88 in / Ø 22.3 mm
Colour	Red

Safety data

Approvals	CE
-----------	----

Electrical data

Bounce time	<10
Bounce time NC	<10 ms
mechanical lifespan	1.000.000 switching cycles
Rated operating voltage U _e	24 V
Rated operating current I _∞	0.25 A
Switch type	Turnkey (NO) 1
Illumination	No
electrical lifespan	1.000.000 switching cycles
	<50 mOhm (AU)
Switching capacity	10 I _e
Continuous thermal current	5 A
Connecting typ	Spring balancer clamp
Number of pins	6

Wire size

Single - wire	28...20 AWG / 0.08...0.5 mm ²
Fine - wire	28...20 AWG / 0.08...0.5 mm ²
Fine - wire (wire end ferrule with plastic collar)	0.25 mm ² / 24 AWG
Fine - wire (wire end ferrule without plastic collar)	0.25 mm ² / 24 AWG

Button Red P2

Wire stripping	5...6 mm / 0.2...0.24 in
----------------	--------------------------


Mechanical data

Torque (mounting nut)	1.5...1.9 Nm
-----------------------	--------------

Electrical drawings



Button Red P2

Connection example 1

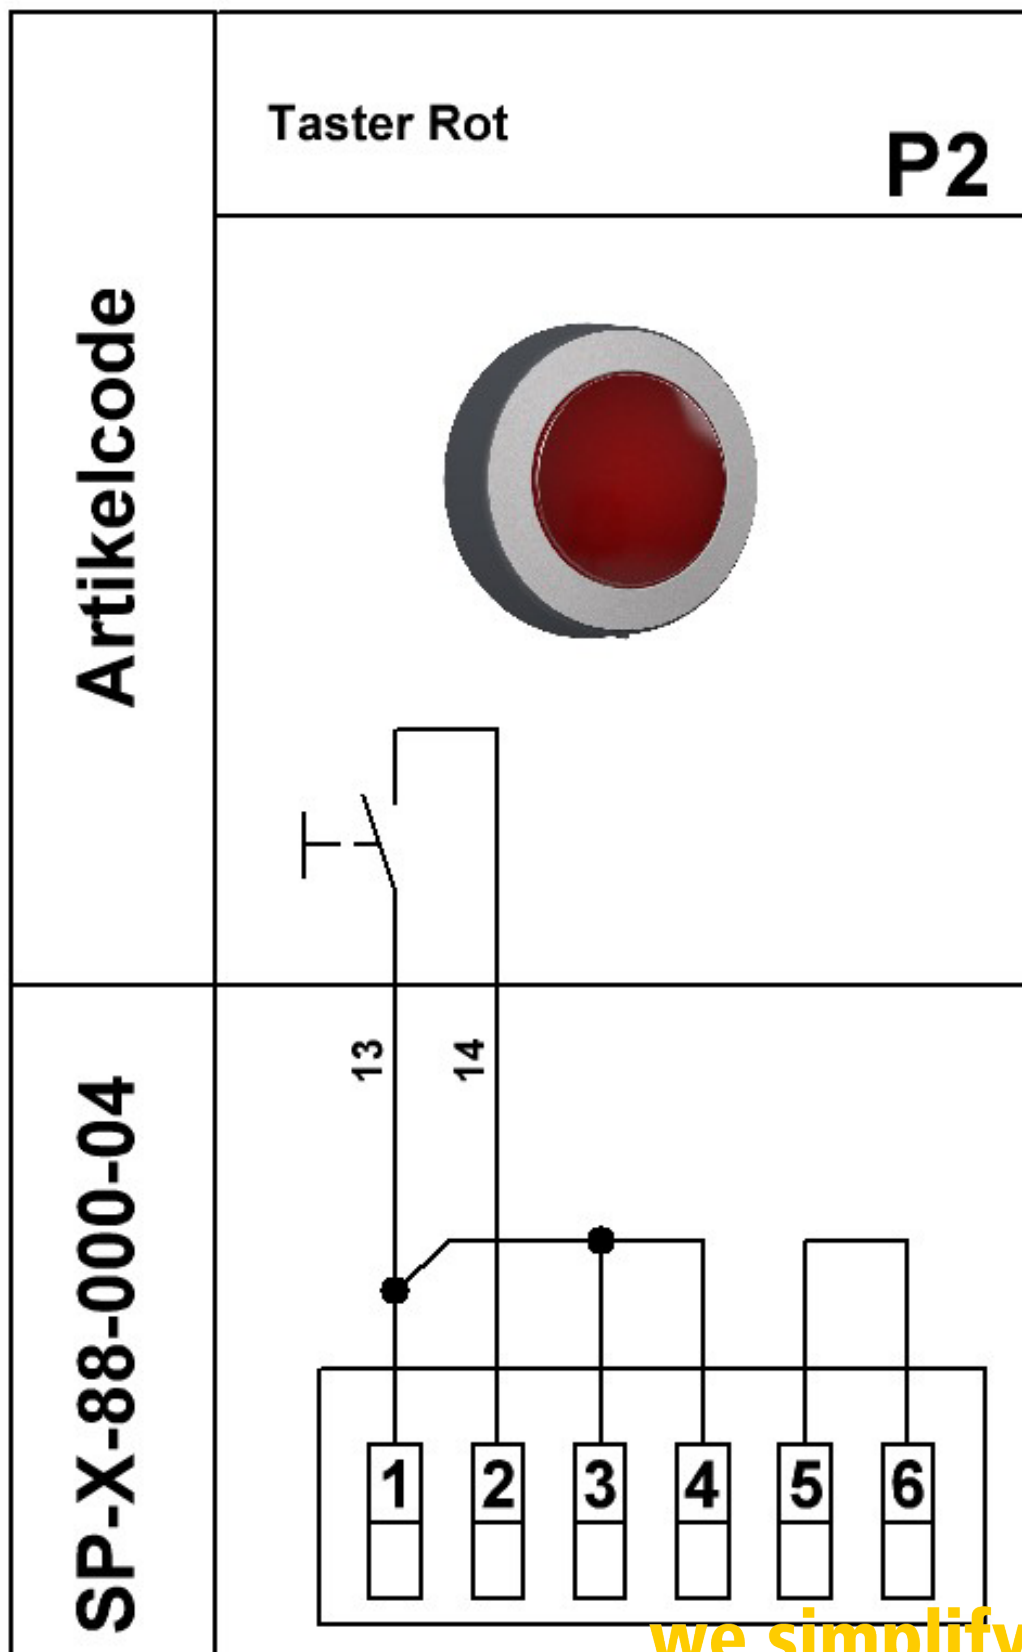

we simplify safety

Button Red P2

Article code ZTK6	Button cap sets for unlit	SP-X-88-001-19	
	buttons		
	Inscription label set ZB1	SP-X-88-001-21	
	Inscription label set ZB2	SP-X-88-001-22	
	Inscription label set ZB3	SP-X-88-001-23	
	Inscription label set ZB4	SP-X-88-001-93	
Article code ZMT	Installation wrench	SP-X-88-001-25	
Article code ZUK	Liftingtool for button and light caps	SP-X-88-001-26	

Button Red P2

Downloads

- Touch Panel
- Product line